


ZIZO



Features:

Simple and easy appearance, in line with contemporary aesthetic concept.
Die Cast Aluminum body with solvent free power coated.
Solvent Free Power Coating with RAL 9003, RAL 9004, Reflectors with Matt White, Matt Black and other special finish on request.
Anti-glare reflector with excellent light dispersion.
High thermal conductivity double-sided aluminum substrate.
High light Transmissivity.
Homogenous, well-balanced, no shadow

Technical Specifications:

Input Voltage : 220- 240 V AC, 50 Hz.
Wattage : 20 - 25 W
High Lumen : 120lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type : COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty : 5 Years
Life Time : 50,000hrs at 25°C
(L80/B10).

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants


Installation Method:

Recessed Stretch Adjustable

Wattage(W)	:	20	25				
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	4000K	5000K	6000K	6500K
Beam Angle	:	15°	24°	36°	60°		
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


*Special Color & Finish on request

Product Code (96808025.50):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out  (mm)
20	2400LM	80x105	70
25	3000LM	80x105	70

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

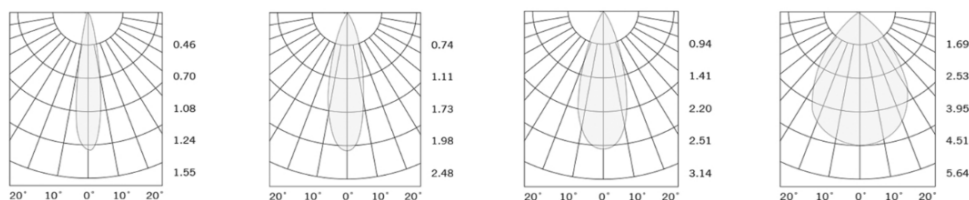

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96808025.50 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	
50K - 5000K	60D - 60°		4 - Phase Dimming	
60K - 6000K			5 - Bluetooth	
65K - 6500K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C