



## BOLE-R



### Description:

Bole-R is a range of high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and PC optical concept. Sophisticated surface finish gives a high end appearance of texture thanks to perfect powder coating.

Our bollards have IP65 certificate tough weather conditions, resistance seawater and corrosion. The professional optical solution offers a fully anti-glare and comfortable light uniformity, reaches 10Meter diameter wide light distribution but a very narrow dark zone under the fixture.

Main uses architectural addition to important business and commercial buildings, corporate headquarters, parks, recreational areas and gardens.

It is available in Round / Square / Mushroom designs, and each design has 250mm, 600mm, 1000mm height.

### Product Specifications:

Housing : Die cast Aluminium  
Diffuser : Polycarbonate  
Coating: Powder Coating  
Net Weight : 5.35KG  
Gasket: Moulding shaped silicone seal  
Power Cable: 0.5 mtr. power cable included  
Driver : High efficiency, low flicker driver  
Installation Type: Surface Mounted  
Adjustable: No  
Warranty: 5 Years

### Technical Specifications:

Wattage: 12-24W  
Voltage: 200-240V AC  
Frequency: 50-60Hz  
Light Source: Bridgelux / OSRAM  
Lumen: 45lm/W  
Mac Adam: 4 Step  
Safety Class: I  
Working Temperature: -30°C to 45°C  
Life Time: 50,000hrs (L80/B10) at 35°C

### Parameter:

Wattage(W)	:	12W / 24W
Finish	:	Black (B) / Silver (S)
Kelvin*	:	3000K / 4000K
Beam Angle	:	180° / 360°
CRI	:	80
Control Mode	:	ON/OFF / DALI / Bluetooth

### Standards :

EN 60598-1  
EN 60598-2-2  
EN 60598-3-2  
EN 60598-3-3



### Order Code:

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
547182	12-12W	30-3000K	A-200-240VAC	180-180°	B-Black	1-ON/OFF
	24-24W	40-4000K		360-360°	S-Silver	2-DALI
						3-Bluetooth

**Ex: Order Code:** 5471821230A180B1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Photometric:

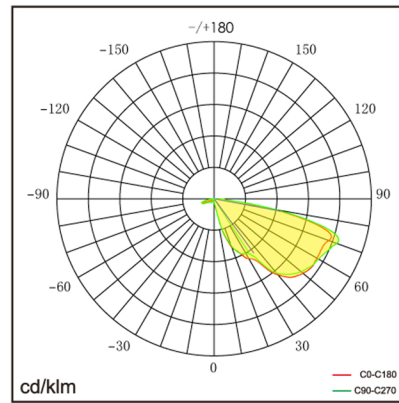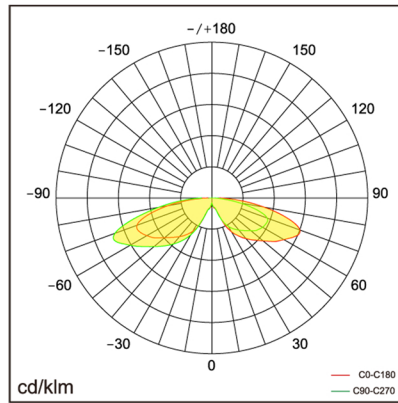

## Accessories:



J Anchor Bolt Kit  
Φ225\*154mm



Expansion screw  
M8-Φ12\*60mm



M682-B(3P)  
IP68 Waterproof connector  
72mm\*21mm



M684-B(5P)  
IP68 Waterproof connector  
99mm\*25mm



M685-Y  
IP68 Waterproof connector  
140mm\*72mm

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C