


## RUB



### Features:

RUB is Surface Mounted Track light, made of die-cast aluminum ensures a strong, long-lasting body that resists wear, corrosion, and high temperatures.

Aluminum also serves as an efficient heat sink, helping to dissipate heat from the light source, extending the lifespan of the LED.

The PMMA lens provides good light transmission, meaning the light output will be bright and clear with minimal distortion, and resistant to UV rays, ensuring long-lasting performance without yellowing or degradation over time.

### Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 20W

High Lumen: 95lm/w

2 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C

(L80/B10)

### Fields of Application:

Retail

Education

Galleries hotels

Living spaces

### Installation Method:

Surface Mounted.

Wattage(W)	:	20				
Finish	:	White(W)	Black(B)	Gray(G)	Customized	
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	10°	15°	24°	36°	50°
CRI	:	80+	90+	97+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Casambi


\*Special Color and Finish on request

### Product Code (96807320):

Wattage	Lumens(lm)	Dimension(Ø x H) mm
20	1900LM	73x155

\*Luminous lux value is calculated for 4000K CRI>90

### Photometric:

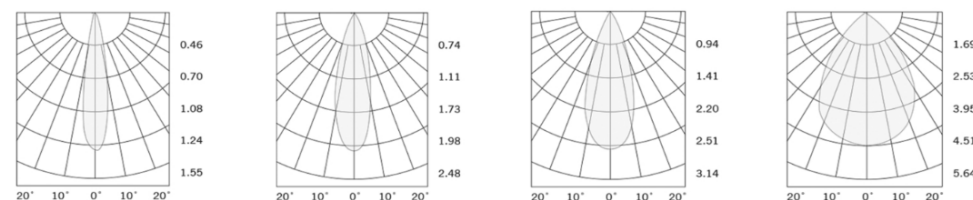

### Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96807320 27K 10D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	10D - 10°	8->80	1 - ON/OFF	W-White
30K - 3000K	15D - 15°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	24D - 24°	9->97	3 - DALI	G-Gray
50K - 5000K	36D - 36°		4 - Phase Dimming	C-Customized
57K - 5700K	50D - 50°		5 - Casambi	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C