



## VIBE MINI



### Features:

EVA downlight simple and easy appearance, in line with contemporary aesthetic concept.  
 The lamp body adopts high-pressure Die-cast aluminum , Clear PMMA Difuser .  
 High reflectance aluminum reflector for extend long service lifetime.  
 High light Transmissivity.  
 Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.  
 Wattage: 5 - 10 W  
 High Lumen: 110lm/w  
 3 STEP Mac Adam  
 High efficiency, low flicker driver  
 Lamp Type: COB  
 Operating Temperature: -20°C to 45°C  
 Glow Wire Test 850° C  
 Warranty: 5 Years  
 Life Time: 50,000hrs at ta 25°C (L90/B10).

### Fields of Application:

Retail  
 Galleries hotels  
 Living spaces  
 Conference rooms  
 Counters  
 Restaurants

### Installation Method:

Recessed.

Wattage(W)	:	5	7	10		
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	15°	24°	45°		
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


\*Special Color & Finish on request

### Product Code (96807012):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
5	550LM	70x77.2	65
7	770LM	70x77.2	65
10	1100LM	70x77.2	65

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

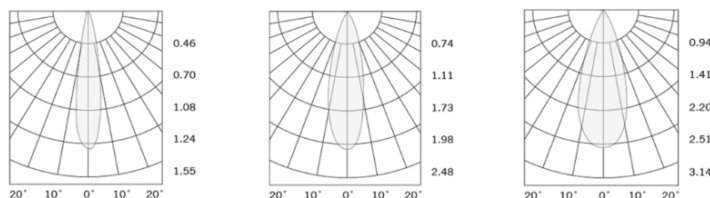

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96807012 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	45D - 45°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C